



Validation of GPS III antenna patterns

P. Steigenberger, S. Thoelert, O. Montenbruck
German Aerospace Center (DLR)

R. Dach
Astronomical Institute, University of Bern (AIUB)




Knowledge for Tomorrow




Introduction


Publication of GPS III satellite metadata by manufacturer Lockheed Martin (LM)

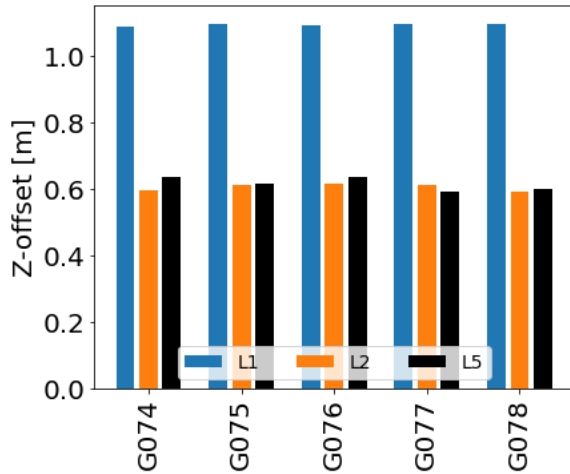

Phase Center Offsets

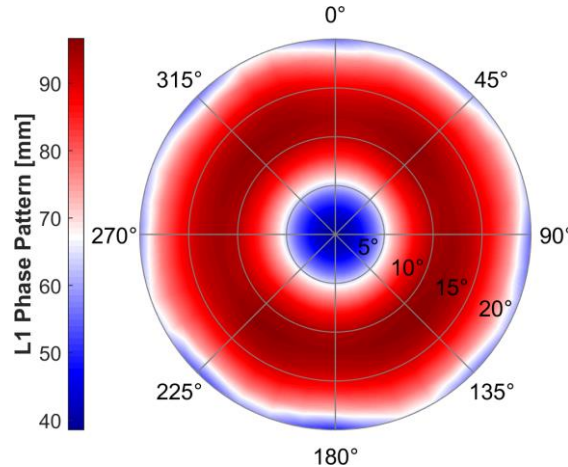

Phase Patterns

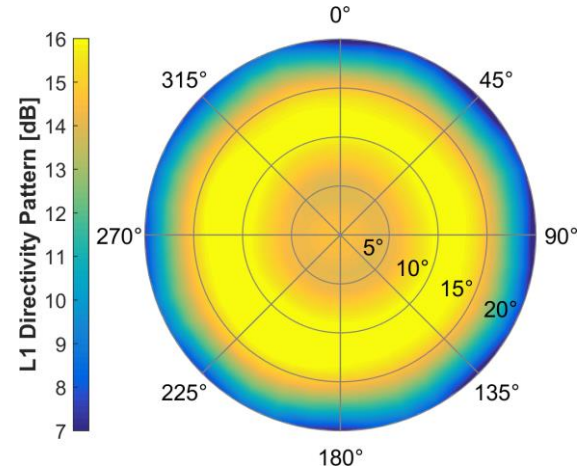

Directivity Patterns






Phase Center Offsets

PCO estimation with NAPEOS:


- 140 GPS and Galileo stations with multi-frequency receiver antenna calibrations
- Ionosphere-free linear combinations of L1/L2 and L1/L5
- IGS20 scale fixed
- 14 months of data

GPS III igs20.atx PCOs: LM values shifted by 8.9 cm

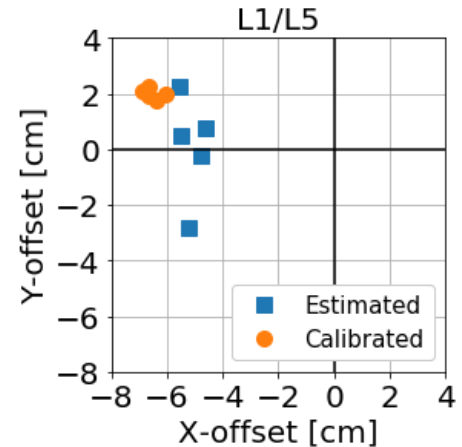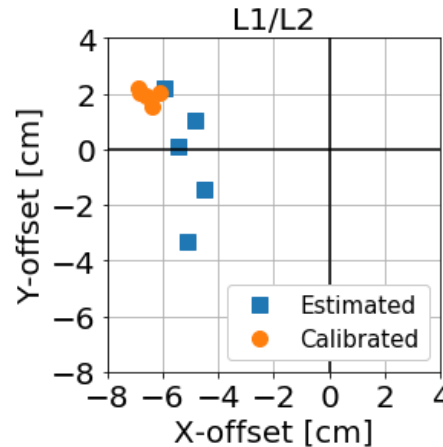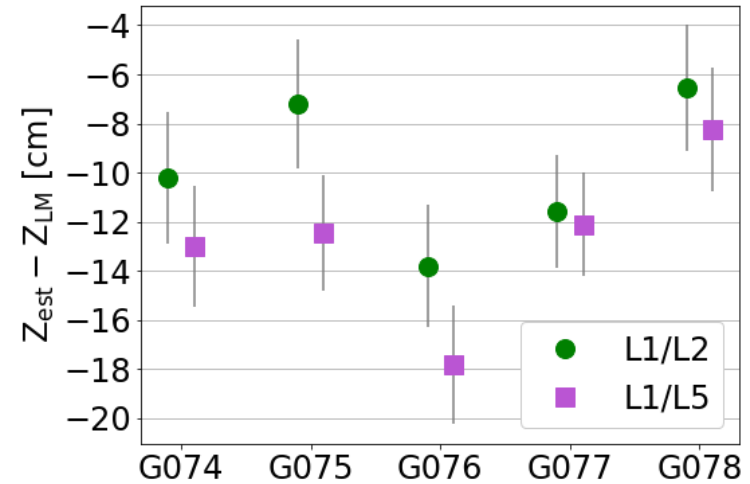

Manufacturer Phase Pattern


- Raw phase pattern ϕ_{raw} w.r.t. unknown calibration reference point for phase calibration
- Estimation of minimized phase pattern ϕ_{min} :
 - grid values from 0 to 14°
 - equal weighting

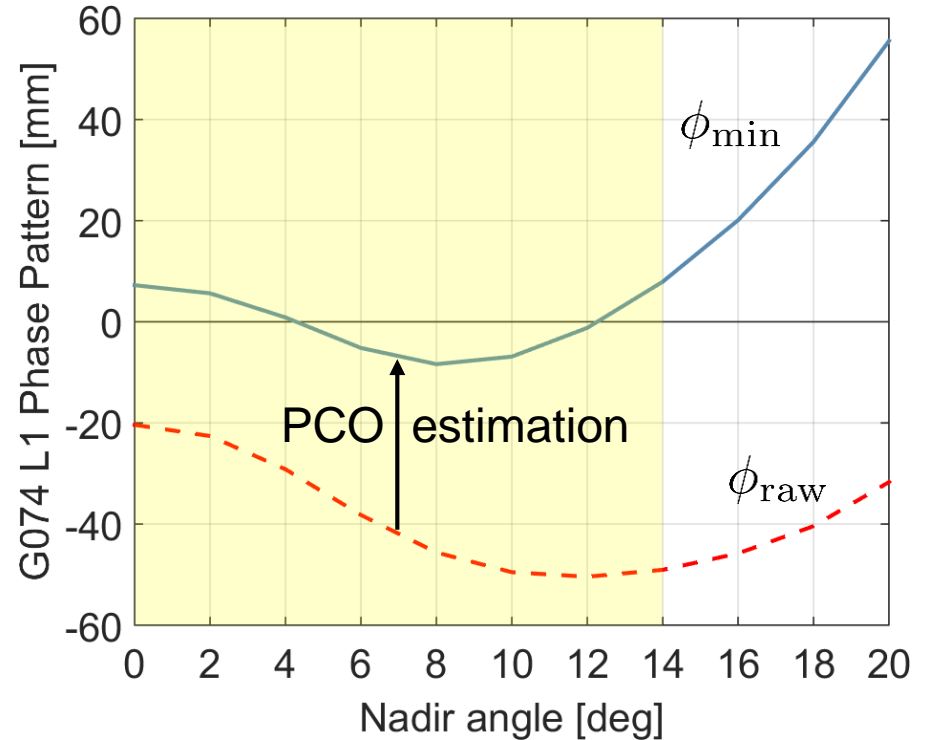

Estimated Phase Pattern

Phase pattern estimation with
Bernese GNSS Software:

- L1/L2 ionosphere-free
- 14 months of data
- IGS20 scale fixed
- 1 deg nadir-dependent

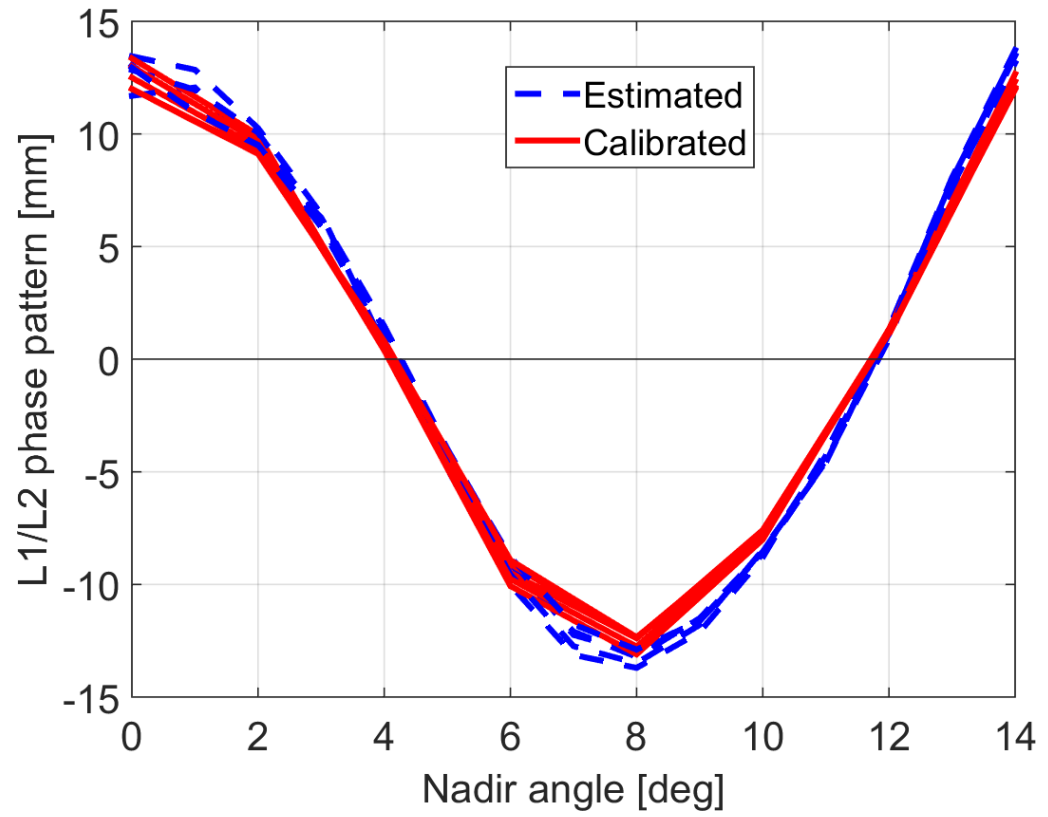

EIRP Measurements

Measurement of equivalent isotropic radiated power with 30 m high-gain antenna

$$P_r = P_s + D_s + G_{cf} + G_r - L_0 - L_a$$

P_r received power [dBW]

P_s transmitted power [dBW]

D_s transmit antenna directivity [dB]

G_{cf} gain correction factor [dB]

G_r receive antenna gain [dB]

L_0 free space loss [dB]

L_a atmospheric loss [dB]




measured

modeled




unknown



EIRP Measurements G075

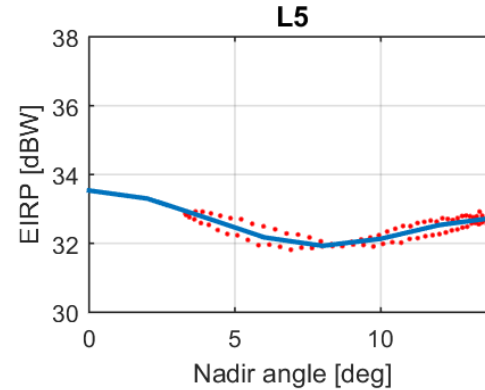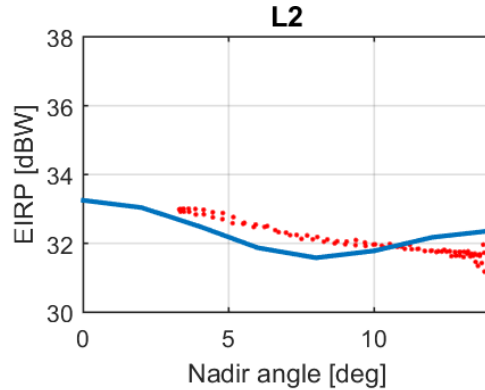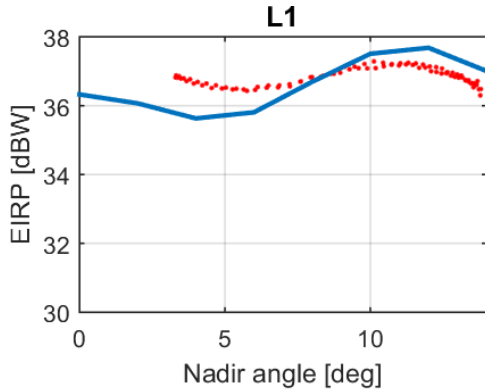



● Measured
— Modeled

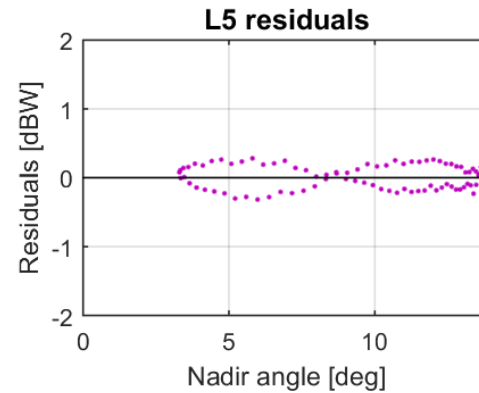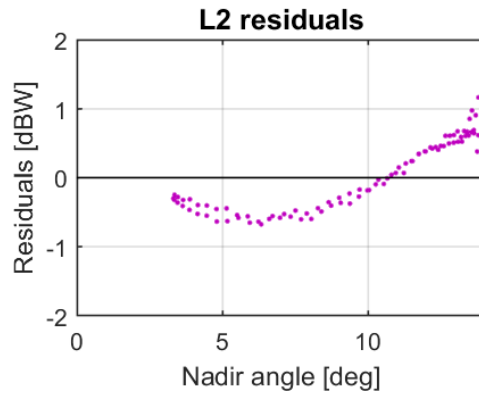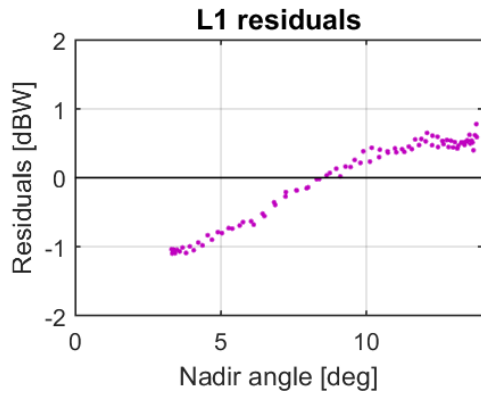

GPS III Transmit Antennas

Main L-Band Navigation
Antenna Array

M-Code Antenna Array

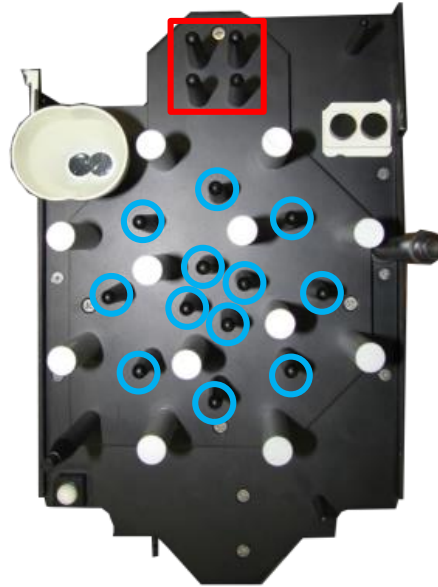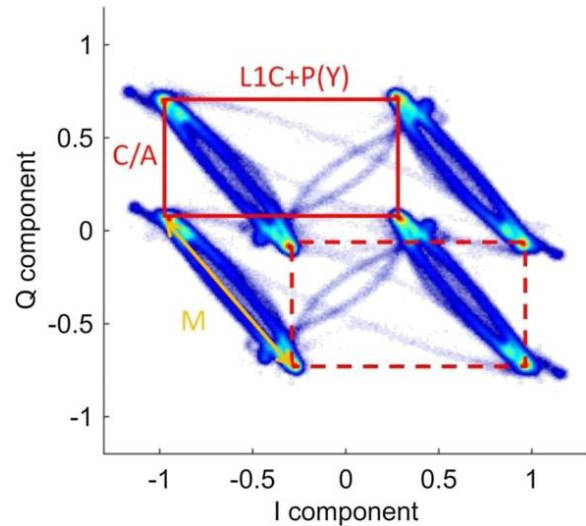




Thoelert S, Steigenberger P, Montenbruck O,
Meurer M (2019) Signal analysis of the first
GPS III satellite. GPS Solutions 23.
<https://doi.org/10.1007/s10291-019-0882-7>



EIRP Residuals with Adjusted Gain Patterns

Assumptions:

- Gain pattern of M-Ant identical with inner ring of L-Ant of Brumbaugh et al. (1976)
- -1.0 dB gain correction factor for L-Ant

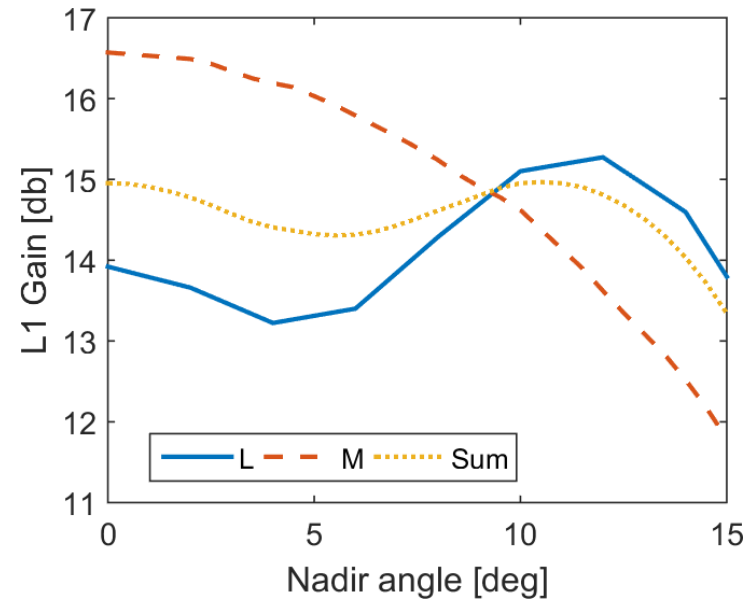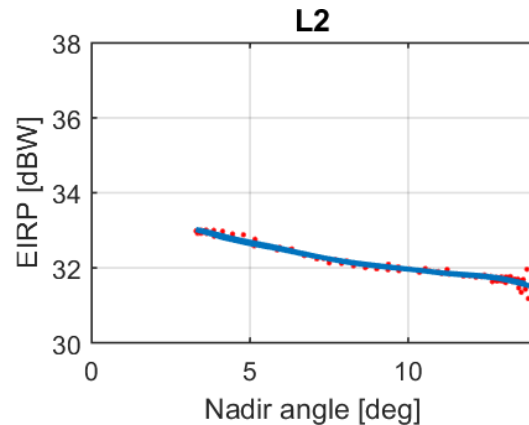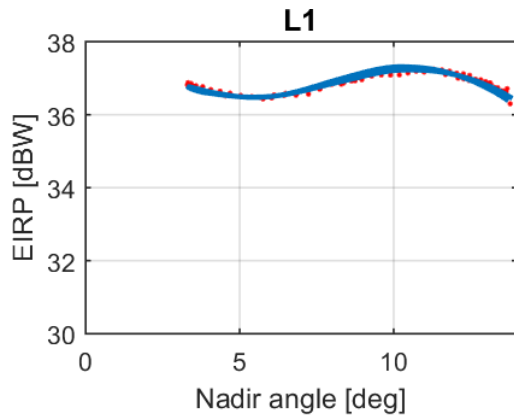

Summary and Conclusions

Phase center offsets

- LM PCOs show systematic offset of 10 cm w.r.t. estimates with ITRF2020 scale
- cm-level consistency of L1/L2 and L1/L5

Phase pattern

- Minimization of raw pattern: 1 mm-level agreement of LM calibrations with estimates


Directivity pattern

- M-code antenna significantly impacts measured EIRP patterns

Recommendations

- Inclusion of minimized GPS III phase pattern in igs20.atx
- Update and publication of further GPS III metadata



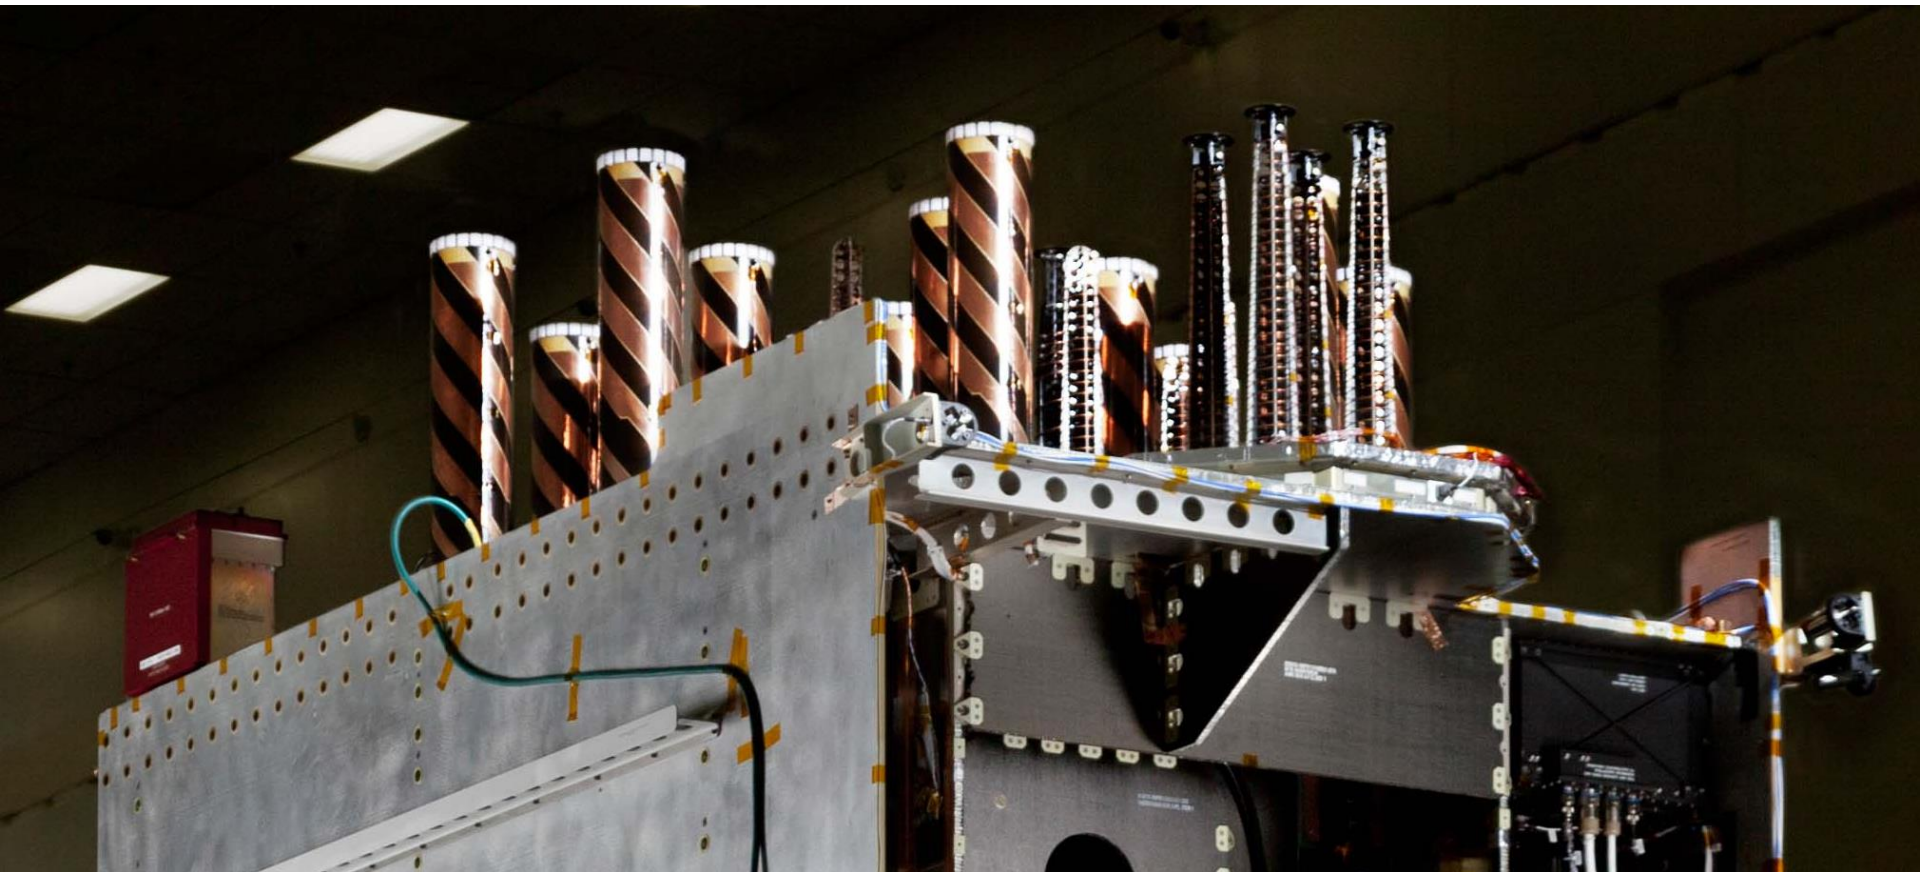

Lockheed Martin



Resources

- GPS Satellite Antenna Panel Patterns:
<https://www.navcen.uscg.gov/gps-technical-references>
- Marquis W, Shaw M (2011) Design of the GPS III Space Vehicle, ION ITM 2011, pp. 3067–3075
- Thoelert S, Steigenberger P, Montenbruck O, Meurer M (2019) Signal analysis of the first GPS III satellite, GPS Solutions, 23(4), <https://doi.org/10.1007/s10291-019-0882-7>
- Marquis WA, Reigh DL (2015) The GPS Block IIR and IIR-M Broadcast L-band Antenna Panel: Its Pattern and Performance, Navigation, 62(4):329–347, <https://doi.org/10.1002/navi.123>
- Brumbaugh CT, Love AW, Randall GM, Waineo DK, Wong SH (1976) Shaped Beam Antenna for the Global Positioning Satellite System, 1976 Antennas and Propagation Society International Symposium, pp. 117–120, <https://doi.org/10.1109/aps.1976.1147624>

