

# Improving the Accessibility of Borehole Geophysics: A Cost-Efficient, Highly Modifiable Borehole Tilt Sensor

[Ian R.J. Lee](#) (1, 3), Robert L. Hawley (1), David C. Collins (2), and Joshua Elliott (4)


(1) Dartmouth College, Department of Earth Sciences, Hanover, NH, USA (2) Dartmouth College, Science Division Electronics Shop, Hanover, NH, USA (3) Pennsylvania State University, Department of Geosciences, University Park, PA, USA (4) Polar Research Equipment, Lebanon, NH, USA

## Introduction

- Our team at Dartmouth College developed a cost-effective tilt sensor for studying ice deformation.
- Original use case was borehole geophysical studies on a polythermal glacier in Alaska ([Lee et al., 2020](#)).
- We present other use cases and feasibility studies.

## Sensor Development

- Built tilt sensors to measure ice kinematics through borehole deformation.
- Measures gravity, magnetic, and temperature data.
- Mass producible from accessible parts at ~20% the price of commercial versions.

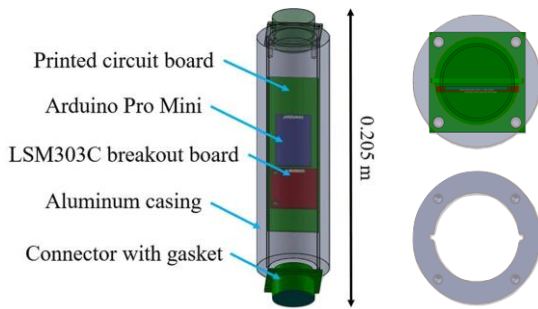

**Figure 1.** Simple tilt sensor schematic. Housed within our sensor is a custom-made PCB board with underlying connections, embedded with a LSM303C breakout board containing a 3-axis accelerometer and magnetometer (along with a built-in temperature sensor), and an Arduino Pro Mini for facilitating serial communication and data transmission. The communication and data transmission occurs via connectors installed at the ends of the sensor, sealed with watertight gaskets. The PCB board circuit is encased within a thick water-proof cylindrical aluminum tube to better withstand high englacial and/or subglacial pressures. Tilt sensors and a datalogger are connected via 22-gauge 4-conductor shielded security cables with ground wire.

## Data Transmission and Collection


- The LSM303C data is read by an Arduino Pro Mini using transistor-transistor logic (TTL), transmitted up the borehole using RS-485 before a conversion back to TTL for input into the Campbell Scientific CR1000 datalogger.



**Figure 2.** The Campbell Scientific CR1000 datalogger uses TTL to send requests for and receive data from our tilt sensor system.

## Case Study – Jarvis Glacier

- Located on the eastern Alaskan range.
- Polythermal glacier with a mixed thermal regime.
- Significant basal melting coupled with harsh cold, wet conditions make Jarvis a difficult study site.

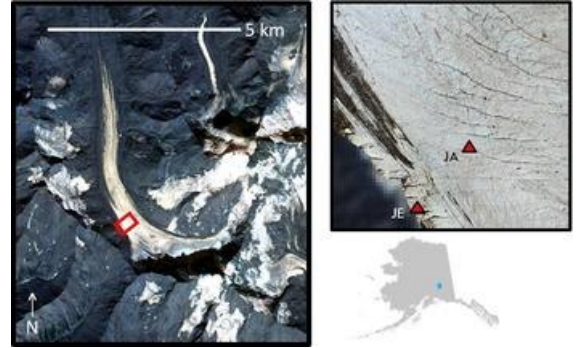

**Figure 3.** Planet satellite view of the larger Jarvis Glacier study site (left), study site with boreholes JA and JE (top right), and study site location in Alaska (bottom right).

## Results and Other Use Cases

- Our tilt sensor system was successfully installed in two boreholes (up to 80 m deep) close to the shear margin of Jarvis Glacier and collected one year of uninterrupted data.
- The gravity and magnetic data measured by our tilt sensors were used to compute ice deformation with depth and its associated uncertainties.
- We evaluated Jarvis Glacier flow dynamics against theoretical models and gained valuable insights into calibrating the flow law for streaming ice ([Lee et al., 2020](#)).
- Temperature data collected on Jarvis Glacier by our tilt sensors also supported microstructures studies ([Gerbi et al., 2021](#), [Hruby, 2019](#)).
- A modified version of our tilt sensors was used in a [Summer 2022 study](#) on Athabasca Glacier by UAF and App State to measure ice deformation rates.

## Interested in our Sensors? Contact us!

- Our tilt sensors are designed to operate in different glacier thermal regimes and can be fitted with many different sensors (pressure, conductivity, etc.).
- In a collaboration with Polar Research Equipment (PRE), our highly cost-effective and modifiable tilt sensors are now available for purchase.
- Interested parties may contact [ianrj.lee@gmail.com](mailto:ianrj.lee@gmail.com) or visit the [PRE website](#) to get started.

We acknowledge the support of the National Science Foundation Office of Polar Programs (Award #1503653). This poster was initially published in ESS Open Archive (doi: [10.1002/essoar.10512964.1](https://doi.org/10.1002/essoar.10512964.1)). See above for author contact.